

RP-3600

**15" or 17" Touch POS Terminal
with Detachable I/O Interface and
HDD Bracket Design**



RP-3600 is a stylish POS terminal featuring a plexi-glass acrylic front bezel design for a polished look. Its aluminum housing is rugged enough to withstand 24/7 retail and hospitality environments and I/O interface and hard disk drive bay are on a easy slide out bracket allowing technicians to access the hard disk without unplugging any cabling reducing down time.



Features

Strong Hinge

Strategically designed for high pressure transactions

Screen stays in place and strong enough for touch screen usage



Compact Form Factor

Sturdy design

Unit stays stationary without additional fastening or bolts



Downward Facing I/O Interface

Cable management


Cabling for power cord and peripherals is hidden beneath the terminal keeping it out of sight, increasing counter space

Optional Integrated Modules: MCR, RFID, Fingerprint, Smartcard, Customer Display, 2nd Display


Flexible modules to adapt to customer needs

Adaptable into a variety of environments with optional peripherals

I/O Interface

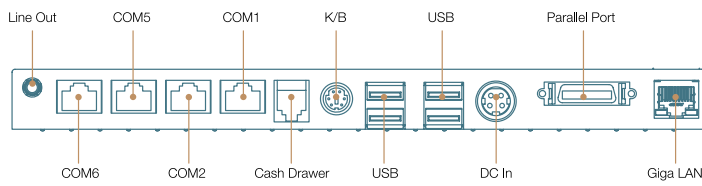

Dimensions

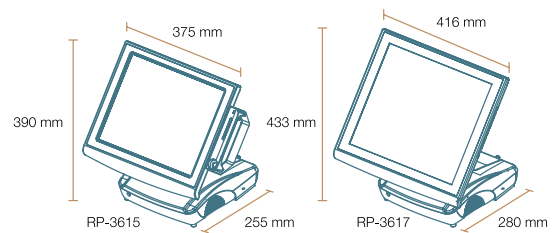

Specifications

Model	RP-3615	RP-3617
Processor	Intel® Celeron® M 1.5 GHz (Default)	
System Memory	512 MB Standard, Maximum 2 GB (1 x 200-pin DDR2)	
Power Supply	150W (12V/12.5A) External Power Adaptor	
Storage Device	1 x 2.5" SATA HDD (2nd HDD Optional) 1 x CF Card (optional)	
Speaker	Built-in 2W x 2	
Construction	Aluminum Die-casting, Plexi-Glass Acrylic (front bezel)	
Housing Color	Black / Silver	
Touch LCD Display		
Size / Resolution	15" TFT LCD / 1024 x 768	17" TFT LCD / 1280 x 1024
Brightness	250 / 350 cd/m ²	380 cd/m ²
Touch Screen	5-Wire Resistive Touch / IR Touch	5-Wire Resistive Touch
I/O Ports		
Serial Port	4 x External COM1, COM2, COM5 & COM6 (RJ45)	
USB Port	4 x External	
Printer Port	1 x Enhanced Parallel Port (SCSI Ribbon 26-pin)	
Cash Drawer Port	1 x 12V RJ11	
Keyboard / Mouse	1 x PS/2	
LAN Port	1 x RJ45 Giga LAN	
Audio Port	1 x Line-out	
2nd Display Connection Port	Specially Designed Connection Port for FEC VFD or 2nd LCD Display	
OS Supported		
Windows	Windows XP, Windows XPE, POSReady 2009, Windows 7	
Linux	Per Request	
Physical Dimensions		
Dimensions (WxHxD)	375 x 390 x 255 mm	416 x 433 x 280 mm
Environment		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Relative Humidity	10% ~ 90% (Non-condensing)	
Optional Peripherals		
Magnetic Stripe Card Reader	MCR Single / Dual / Triple Track	
2-in-1 / 3-in-1	MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button	
2nd Display / Customer Display	8.4" / 12.1" / 15" Pole-type LCD Display (Touch Screen Optional)/ Pole-type VFD Customer Display	
Wireless LAN	802.11 b/g/n Wireless LAN Module USB Interface	