

无扇式POS计算机

BP-325 / BP-363



FEC

BP-325

BP-363

精巧、低音、低耗能 出自伍丰.

装载Intel Bay Trail / Atom D525处理器, BP-363和BP-325是完美至极的BOX系统,也是让您发挥安装极致创意的最佳选择。并且提供各种可选用的I/O装置,未来您可以不需担心任何周边无法兼容的问题。

产品特色

BP-325



Type A: Standard



Type B: Dual VGA



Type C: Printer 24V



Type D: Dual LAN

BP-363



Base Configuration

Optional I/O



Type A



Type B



Type C




Type E



Type G



Type H

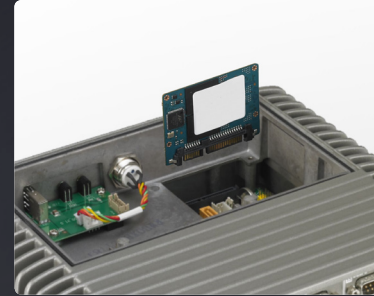

可选配SATA DOM (仅BP-325)



操作简便
立即拆换SATA HDD或SSD硬盘



维修快速
电源键、网络状态指示灯、硬盘指示灯、
USB插槽都在机身正面



绝佳散热
独家机身设计, 加速散热效果



各地安装
透过FEC托架套件, 任何平面都能安装



升级快速
主板能轻易拆换, 使升级维修更快速



- 结合第二屏幕AerMonitor与其他周边配备装置, 即是完整的POS系统
- 提供多种可选的I/O装置, 因应不同的应用环境
- 可做为自助KIOSK系统的计算机主机
- 模块化设计, 安装、维修、升级都能轻易完成



仅重2.4公斤



极致精巧,
宽23公分、高6.5公分、长19公分



弹性的客制化

Specifications



Model	BP-325	BP-363
Processor	Intel® Atom™ D525, 1MB L2 Cache, 1.8GHz	Intel® Celeron J1900 up to 2.42 Ghz
System Memory	1GB Standard, Maximum 4GB (1 x 204-pin DDR3)	2GB Standard, Maximum 8GB (1 x 204-pin DDR3L)
Power Supply	60W (12V / 5A) External Power Adaptor	150W (12V / 12.5A) External Power Adaptor
Storage Device	1 x 2.5" SATA HDD or SATA SSD	1 x 2.5" SATA HDD or SSD
Optional Storage Device	1 x SATA DOM	N/A
Graphic	Intergrated	Intel HD
Construction	Aluminum Die-casting + Plastic	
Housing Color	Iron Grey	

I/O Ports		
Serial Port	2 x External: COM2 (DB9) COM4 (RJ45)	3 x External: COM1 (RJ45), COM2 / COM3 (DB9) with RI / 5V / 12V Selectable
USB Port	5 x External (1 Front, 4 Rear)	6 x External (USB 2.0 x 3; USB 3.0 x 1; USB 2.0 x 1 Front; Powered USB 24V x 1)
Printer Port	1 x Bi-directional Parallel Port	By Request
Cash Drawer Port	1 x RJ11 (12V)	1 x RJ11 (12V / 24V)
Keyboard / Mouse	1 x PS/2	N/A
LAN Port	1 x RJ45 Giga LAN	1 x RJ45 Giga LAN
Expansion Slot	1 x Mini PCI-e (Internal)	1 x Mini PCI-E (Internal / USB + PCI-E x 1)
Audio Port	1 x Line Out	N/A
Video Port	1 x VGA	1 x VGA ; 1 x HDMI
DC Output	1 x 12V DC Jack 2.5 mm	N/A

Optional I/O Board		
Type A	Serial Port: COM1, COM3, COM5, COM6 (DB9); 1 x Mic-in	Serial Port: COM A & COM B (RJ45) with RI / 5V / 12V Selectable; DC Output: 1 x 24V; 1 x Mic-in
Type B	Serial Port: COM1, COM6 (DB9), COM3, COM5 (RJ45) Video Port: 1 x VGA; DC Output: 1 x 24V; 1 x Mic-in	Serial Port: COM A & COM B (RJ45) RI / 5V / 12V Selectable; Powered USB Port: 1 x 24V; 1 x Mic-in (Limited current when using Power USB 24V)
Type C	Serial Port: COM1, COM6 (DB9) COM3, COM5 (RJ-45) DC Output: 1 x 24V DIN 3p for Printer; 1 x Mic-in	Serial Port: COM A & COM B (RJ45) RI / 5V / 12V Selectable; Powered USB Port: 1 x 12V; 1 x Mic-in
Type D	SerialPort: COM1, COM3, COM5, COM6 (DB9) LAN Port: 1x RJ45 Giga LAN; 1 x Mic-in	N/A
Type E	N/A	Cash Drawer Port: 2 x 24V (RJ11) ; 1 x Mic-In
Type G	N/A	Powered USB Port: 3 x 12V
Type H	N/A	Powered USB Port: 1 x 24V, 2 x 12V (Limited current when using Power USB 24V)

OS Supported		
Windows	Windows XP, POSReady 2009, Windows 7, Windows Embedded POSReady 7	Windows 7, Windows Embedded POSReady 7, Windows 8.1, Windows Embedded 8.1 Industry, Windows 10

Dimensions & Weight		
Product	230 (W) x 65 (H) x 190 (D) mm, 2.4 Kg	
With Carton	400 (W) x 250 (H) x 130 (D) mm, 3.5 Kg	