

# PA-3622

› The One-of-a-kind highly integrated fanless 15.6" POS Terminal

**NEW**



## Features



- Fanless design with Intel® Celeron® J1900
- 15.6" LED backlight panel with bezel-free capacitive touch
- Slim and flexible design for versatile applications
- Optional MSR / i-Button / Fingerprint / VFD / Printer
- Optional integrated wireless LAN

## Specifications



System	CPU Support	Intel® Celeron® J1900
	Memory	DDR3L SO-DIMM (1 slot, up to 8GB)
	Network	10/100/1000 base-T fast Ethernet
	Power Supply	60~90 Watt power adapter
	Audio	2W speaker
	System Weight	with power adaptor approx. 5.5Kg
	Dimensions	391 x 171 x 310 mm (W x H x D)
	O.S. Support	Windows 10(64), Windows 8.1(64), Windows 7(32/64), POSReady 7
Storage	SATA	1 x 2.5" HDD or SSD
I/O Ports	USB	on rear
		3 x USB 2.0 1 x USB 3.0
	on side bezel	1 x USB 2.0
		Serial Ports
	LAN	1 x RJ45
	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
DC-in	1 x 4pin DC power jack	
Peripherals	Customer Display	VFD, 20 columns and 2 lines, each column is 5 x 7 dots
	Printer	2" or 3" easy loading thermal printer with auto-cutter
	MSR & iButton	JIS-I or II, ISO Track1+2+3 (PS/2 interface)
	Fingerprint	8-bit grayscale, reader
Display	LCD	15.6" TFT LCD
	Resolution	1366 x 768
	Brightness	220 cd/m <sup>2</sup>
	Touch Screen	15.6" capacitive touch panel, USB interface (EETI controller)
	Tilt Angel	24 ~ 30 degrees
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0 ~ 35°C
	Storage Temp.	-5 ~ 60°C
	Humidity	20 ~ 90%

\*All information contained in this document is subject to change without prior notice. Please log on [www.protech.com.tw](http://www.protech.com.tw) to acquire latest information.


## Applications

- Retail / Chain Store
- Food Service




## Highlights



## System I/O Ports

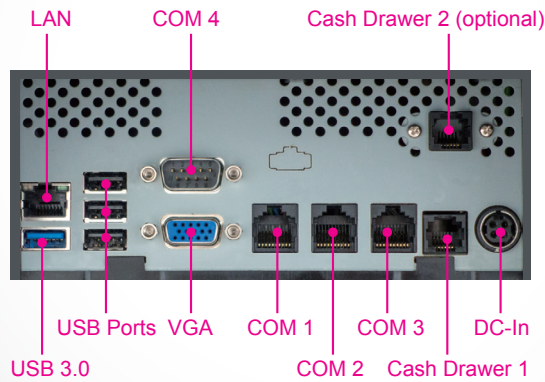

## Dimensions

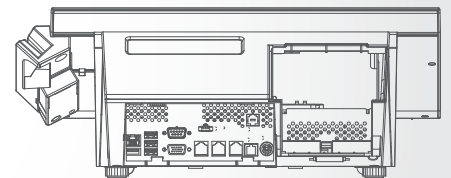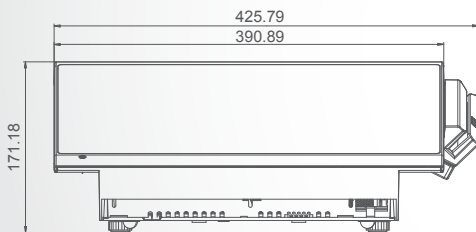

unit: mm